






Material	
Color	
Appearance	Ⓐ , B , C , D
Tolerance	Precision,Medium, Ordinary

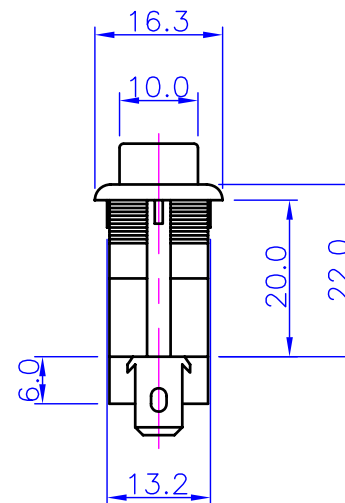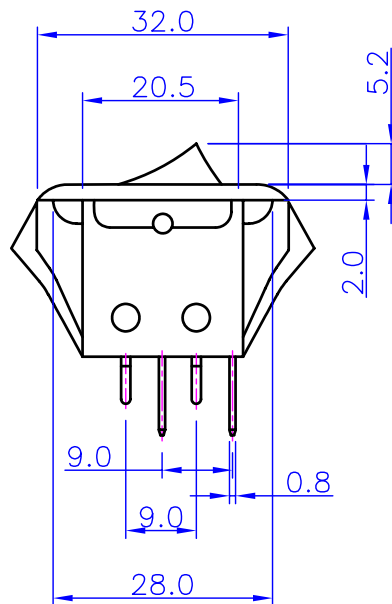


Specifications:



- 1:Certification :UL, CSA, TUV
- 2:Mechanical Life :Over 30,000 Cycles
- 3:Electrical Life :Over 10,000 Cycles
- 4:Actuator Material :Polycarbonate(PC) UL94-V2
- 5:Base Material :Nylon 66 UL 94-V2
- 6:Insulation Resistance :100MΩ 500VDC
- 7:Dielectric Strenght :1,500VAC 1 minute
- 8:Electrical rating :15A 250V AC
- 9>Contact resistance :<20mΩ (intial)
- 10:Terminal :Brass Silver Plated

DO NOT SCALE DRAWING UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS	MODEL		 HON HAMN GROUP CORP.					
	MATERIAL							
THIRD ANGLE PROJ. 	FINISHED		DESCRIPTION 81L Series					
	Q'TY							
DECIMAL TOLERANCES x .xx xxx ANGLES X DEG	DRAWN	DATE	DRAWING NO ROCKER SWITCH					
	CHECK							
NO.	Date	Drawn	Checked	Approved	REV:	SCALE	SHEET	1 OF 1

Material	
Color	
Appearance	Ⓐ , B , C , D
Tolerance	Precision,Medium, <u>Ordinary</u>

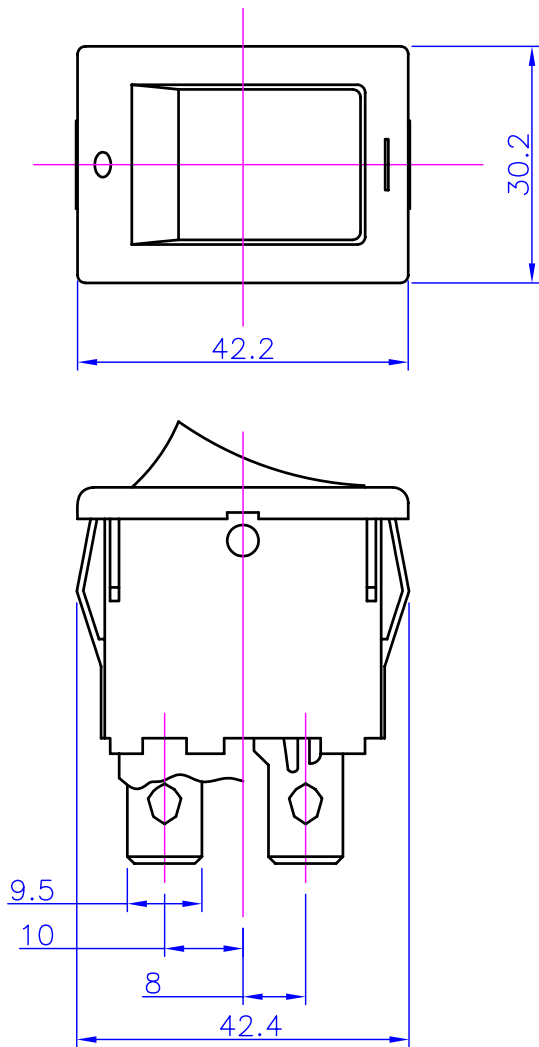



Z	Y	X
0.70-1.25	12.80-12.90	19.20-19.30
1.25-2.00	12.80-12.90	19.30-19.40
2.00-3.00	12.80-12.90	19.50-19.60

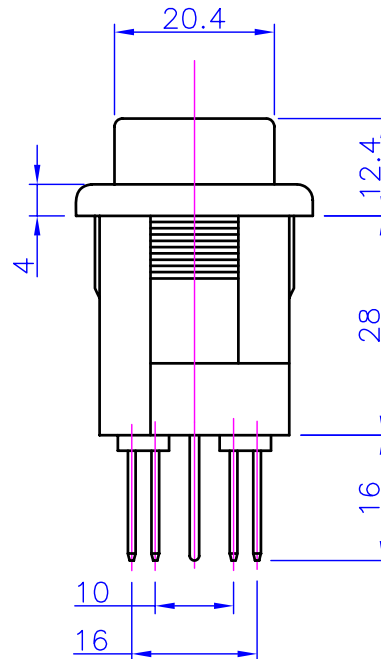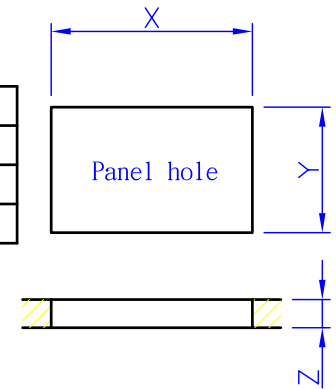

Specifications:





- 1:Certification :UL, CSA, VDE
- 2:Mechanical Life :Over 30,000 Cycles
- 3:Electrical Life :Over 10,000 Cycles
- 4:Actuator Material :PC & PA66 UL94-V2
- 5:Base Material :PA 66 UL 94-V2
- 6:Insulation Resistance :100MΩ 500VDC
- 7:Dielectric Strength :1,500VAC 1 minute
- 8:Electrical rating :9A 125V AC & 6A 250V AC
- 9>Contact resistance :<20mΩ (initial)
- 10:Terminal :Brass Silver Plated

NO.	Date	Drawn	Checked	Approved

DO NOT SCALE DRAWING	MODEL		 HON HAMN GROUP CORP.
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS	MATERIAL		
	FINISHED		
THIRD ANGLE PROJ.	Q'TY		DESCRIPTION
	DRAWN	DATE	DRAWING NO
	CHECK		
DECIMAL TOLERANCES	DESIGN		Rocker Switch-2
x .xx xxx ANGLES X DEG			REV: SCALE SHEET
			SIZE A4 1 OF 1

Material	
Color	
Appearance	Ⓐ , B , C , D
Tolerance	Precision,Medium, Ordinary



Z	Y	X
0.70-1.25	22.20-22.30	29.50-29.60
1.25-2.00	22.20-22.30	30.50-30.60
2.00-3.00	22.20-22.30	30.65-30.75

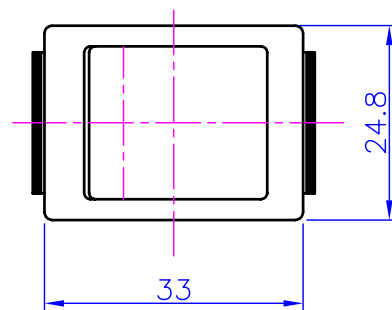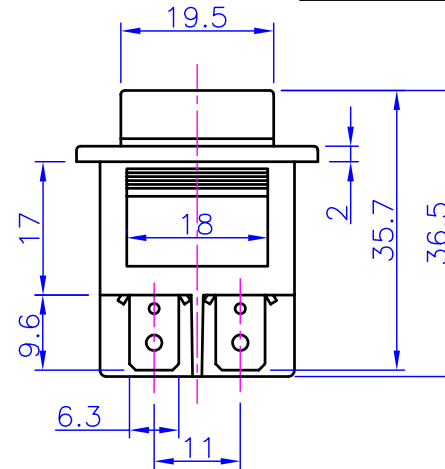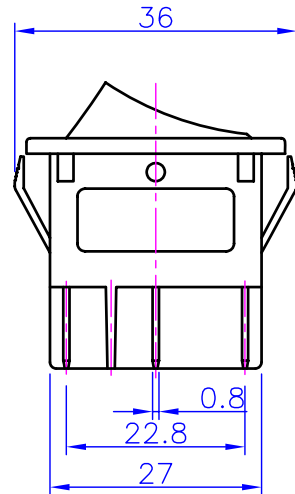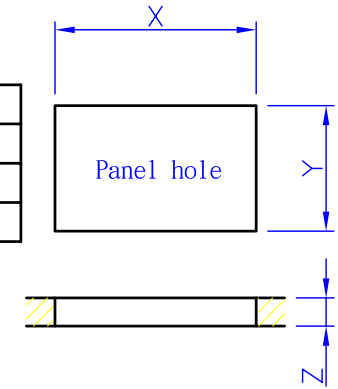

Specifications:


- | | |
|-------------------------|----------------------------|
| 1:Certification | :UL, CSA, TUV, VDE |
| 2:Mechanical Life | :Over 30,000 Cycles |
| 3:Electrical Life | :Over 10,000 Cycles |
| 4:Actuator Material | :PC & PA66 UL94-V2 |
| 5:Base Material | :PA 66 UL 94-V2 |
| 6:Insulation Resistance | :100MΩ 500VDC |
| 7:Dielectric Strength | :1,500VAC 1 minute |
| 8:Electrical rating | :20A 125V AC & 15A 250V AC |
| 9:Contact resistance | :<20mΩ (initial) |
| 10:Terminal | :Brass Silver Plated |

NO.	Date	Drawn	Checked	Approved

DO NOT SCALE DRAWING UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS	MODEL		 HON HAMN GROUP CORP.
	MATERIAL		
	FINISHED		
THIRD ANGLE PROJ.	Q'TY		DESCRIPTION
	DRAWN	DATE	DRAWING NO
	CHECK		Rocker Switch-3
DECIMAL TOLERANCES	DESIGN		REV:
x .xx xxx ANGLES X DEG			SCALE
			SHEET
			1 OF 1

SIZE
A4



Material	
Color	
Appearance	Ⓐ , B , C , D
Tolerance	Precision,Medium, <u>Ordinary</u>

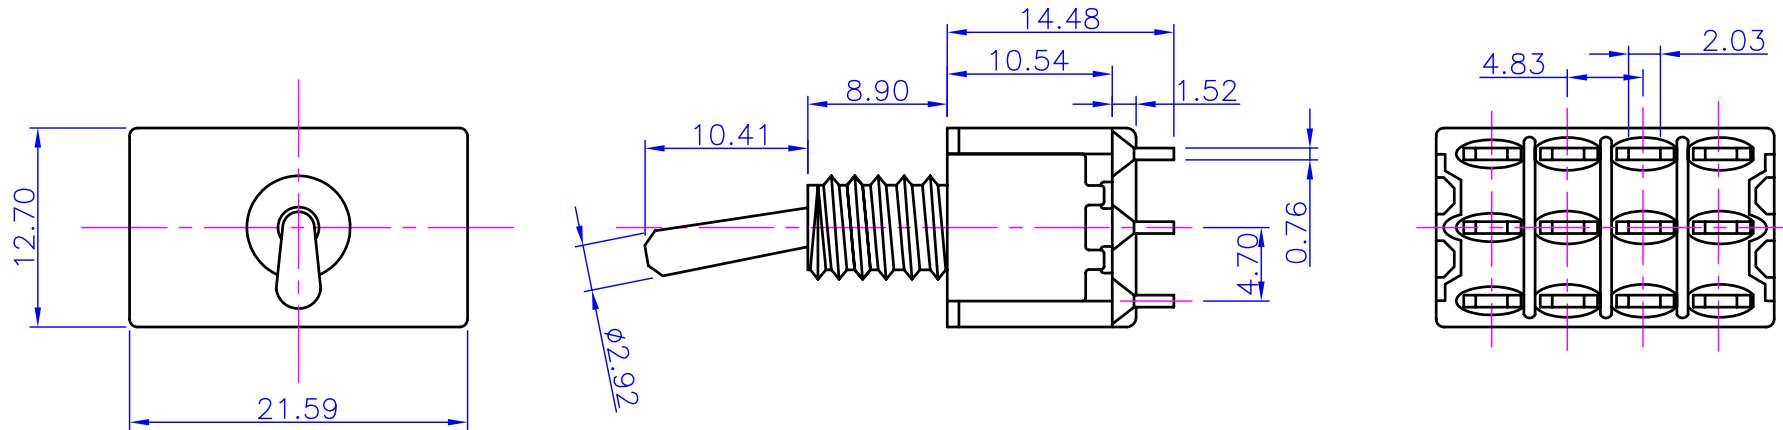

Specifications:

- 1:Certification :UL
- 2:Actuator Material :Stainless Steel
- 3:Base Material :Dially phthalate (DAP)(UL94V-0).
- 4:Dielectric Strenght :1000VAC 1 minute
- 5:Contact resistance :10mΩ max.intial @2-4VDC
- 6:SWITCH SUPPORT :Brass, tin plated.
- 7:Electrical Life :40,000 make-and-break cycles at full load.

NO.	Date	Drawn	Checked	Approved

DO NOT SCALE DRAWING	MODEL		 HON HAMN GROUP CORP.
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS	MATERIAL		
	FINISHED		
THIRD ANGLE PROJ.	Q'TY		DESCRIPTION
	DRAWN	DATE	DRAWING NO
DECIMAL TOLERANCES	CHECK		Switch-4
x .xx xxx	DESIGN		SIZE A4
ANGLES X DEG			REV: SCALE SHEET 1 OF 1